

BE-1000ND Series




Description Features:

- * Provides control signal amplification and distribution functions
- * RS485 The output communication signal is a safety isolated signal for easy inspection
- * Compatible with RS232, RS485 connectors
- * The communication output terminal has built-in lightning protection and surge protection circuit
- * System status indicators
- * Transmit RS 4 85 output signals up to 1200 m
- * 1U standard cabinet type aluminum alloy shell

Specification

Model	BE-1008ND	BE-1016ND
Application	Isolation and distribution of signals	
Communication mode	RS232 to RS485 / RS485 to RS485	
Communication serial port capacity	1 input 8 outputs	1input 16 outputs
Signal input mode	RS232/RS485	
Signal output mode	RS485	
Operating temperature	-10°C~50°C	
Working humidity	>90% (Non-condensing)	
weight	2Kgs	
power input	11VAC 60Hz	

Dimensions :

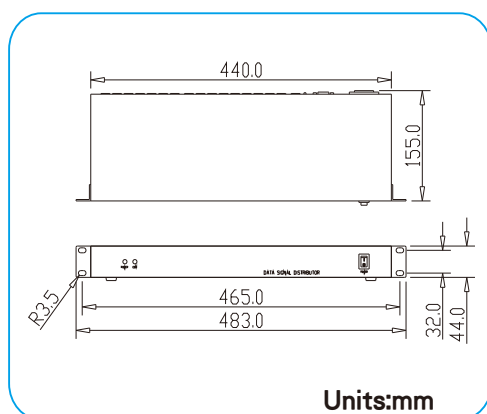

Backplane icon :

