

VIR-IR05MP20K

IP Surveillance Equipment

HD-SDI / 3G-SDI Equipment

AHD / TVI / CVI Equipment

HDMI / VGA Equipment

Speed Dome Camera

Matrix Switcher Solutions


Water-proof IR Network Bullet Camera

VIR-IR05MP20K



Description Features:

- H.265 / H.264 / MJPEG video compression
- 5MP/4MP/2MP/720P
- Lens: 3.6mm Fixed Lens
- Max. IR Distance: 20m
- True Day / Night ICR
- IP66 all-environments protection,
- Support DC12V power supply
- ONVIF 2.4 Support

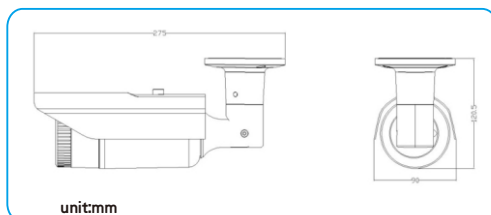

Video Access Technology Corp.

4F.-11, No.6, Lane 609, Sec. 5, Chongxin Rd., Sanzhong Dist., New Taipei City, Taiwan (Tong Cheng Industrial Zone)

Tel:+886-2-2999-8383 Fax:+886-2-2999-0303

web : www.videoaccess.com

VIR-IR05MP20K

	Specification	VIR-IR05MP20K
System	Operating System	Embedded LINUX
	Capacity	Simultaneous remote monitoring, local recording and remote control
	User Interface	WEB, CMS, NVR
Camera	Image Sensor	1/2.5" 5.0Megapixel Progressive Scan CMOS Sensor
	Effective Pixels	2592(H) × 1920(V)
	Electronic Shutter	1/5s to 1/50,000s
	Mini. Illumination	Color:0.1Lux/F1.2 ; B/W:0.005Lux/F1.2
	Signal Noise Ratio	>50dB
	Gain Control	Auto/Manual
	White Balance	Auto/Manual
	Day/Night Mode	Auto, dual IR-Cut filter
	WDR Dynamic Range	DWDR
	Lens Type	3.6mm Fixed Lend (6mm optional)
Video	Video Compression	H.265/H.264
	H.264 Encode Type	H.264 Baseline/H.264 Main Profile/H.264 High Profile Optional
	Image Resolution	5MP/4MP/2MP/720P/D1/CIF
	Encoding Speed	Main Stream : 5MP/4MP/2MP/720P(30fps/25fps) Extra Stream : D1/CIF:(1~30fps/25fps)
	Video Bit Rate	Main Stream : 200Kbps~12Mbps Sub Stream : 100Kbps~6Mbps
	Video Format	NTSC/PAL
	Analog Video Output	1 channel BNC (1.0Vp-p, 75 Ω)
Network	Ethernet	RJ-45 (10/100Base-T)
	Network Protocol	IPv4/IPv6、RTSP/RTP/RTCP、TCP/UDP、HTTP、DHCP、DNS、FTP、DDNS、PPPoE、SMTP
	Onvif	ONVIF Ver.2.4
	Max User Access	10 users
	Smart phone	Iphone , Ipad ,Android
	Remote Operation	Monitor, System setting, Log information,Maintenance & Upgrade.
Infrared	IR Illuminators	4 Pcs Φ11 IR lights
	IR Distance	20M
Audio	Audio Compression	G.711a/G711u Optional
	Audio Bit Rate	G.711a(8kbps)/G.711u(8kbps)
	Audio Input	1-channel 3.5mm audio interface MIC IN/Line IN
	Audio Output	1-channel 3.5mm audio interface (line level ,600Ω)
Auxiliary	Reset Input	One Reset Button(Hold on 3 seconds at least)
Interface	SD Card	Max 32GB, local storage
	RS485	Yes
	Alarm Input	1-channel input ,N.O /N.C modes adjustable
	Alarm Output	1-channel output ,120VAC 1A/24VDC 1A
General	Power Supply	DC12V
	PoE (optional)	IEEE802.3af(VIR-IR05MP20KZ-P)
	Power Consumption	<10W
	Working temperature	-10℃~+60℃
	Working humidity	10%~90%
	Dimensions(mm)	157(W) × 70(H) × 66(D)mm

Video Access Technology Corp.

4F.-11, No.6, Lane 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City, Taiwan (Tong Cheng Industrial Zone)

Tel:+886-2-2999-8383 Fax:+886-2-2999-0303
web : www.videoaccess.com