

# AHD CVI TVI C V T

HDMI T AHD CVI TVI ITH HDMI T

M ACT H



I

## AT

- Receive the HDMI video then convert to AHD/CVI/TVI output and HDMI loop output.
- The HDMI video input supports:  
800x600, 1024x768, 1280x720, 1280x1024, 1360x768, 1366x768, 1440x900, 1920x1080p 60, 59.94, 50, 30, 25 Hz.
- HDMI input supports: 1080p, 1080i.
- The video output of AHD/CVI/TVI supports 720p or 1080p 30, 25Hz.
- The resolution of HDMI loop output is same as the HDMI input.
- With 720p/1080p and NTSC/PAL switcher
- C /T i o o o video io
- With POWER LED and RUN LED.
- 
- 

Video Input	1-ch HDMI
Video Output	AHD/CVI/TVI , HDMI LOOP OUT
Power Supply	DC12V/1A
Consumption	3W
Working Temperature	-10 C 55 C
Working Humidity	10 90
Dimension	147 90 36 mm 5.78 x3.54 x1.41 )
Weight	Ø2kg

## PANEL DESCRIPTIONS

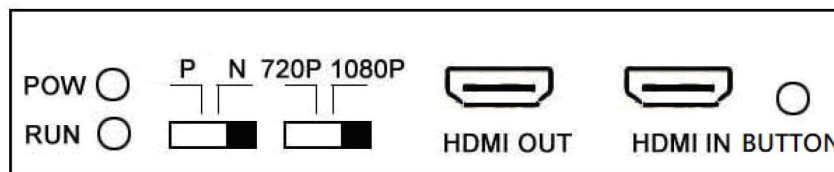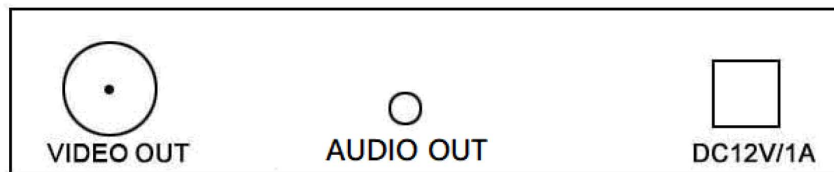

↑  
(AHD/TVI/CVI selection)

## CONNECTING AND OPERATING

- 1) Connect the HDMI source into the HDMI in.
- 2) Connect the AHD/CVI/TVI output to AHD/CVI/TVI receive device.
- 3) Connect power adapter into the device. For a moment, when the RUN LED is flashing, the device works normally.

## PACKING CONTENTS

- 1) HDMI TO AHD/CVI/TVI Converter
- 2) Operating Instructions
- 3) Power adapter DC12V/1A

## MAINTENANCE

Clean the unit with a soft, dry cloth, never use alcohol, paint thinner or benzene to clean the unit.

## Dear Customer

Thank you for purchasing this product, for optimum performance and safety, please read these instructions carefully before connecting/operating this product. Please keep the manual for future reference.