

VHDI-WIR600M

IP Surveillance
Equipment

HD-SDI / 3G-SDI
Equipment

AHD / TVI / CVI
Equipment

HDMI / VGA
Equipment

Speed Dome Camera

Matrix Switcher Solutions

High-Resolution Transmission

Remote · Instant Display · High Penetration · Plug and Play



Wireless Transmission 600 Meters



Wireless SDI / HDMI Transmitter

Wireless SDI / HDMI Receiver

Video Access Technology Corp.

6F.-17, No.14, Lane 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City, Taiwan (Tong Cheng Industrial Zone)

Tel:+886-2-2999-8383 Fax:+886-2-2999-0303

web : www.videoaccess.com

BENESTON® | Data Sheet

videoaccess.com

IP Surveillance Equipment

HD-SDI / 3G-SDI Equipment

AHD / TVI / CVI Equipment

HDMI / VGA Equipment

Speed Dome Camera

Matrix Switcher Solutions

VHDI-WIR600M

Remote wireless video transmission equipment

With the video broadcast transmission solutions are increasingly widely used, such as: high wire costs and environmental life of peripheral equipment, sudden damage events, etc., led to the impact of video transmission.


This product can be in a special environment to provide a better and more convenient video signal transmission solution, this product is suitable for indoor and outdoor shooting needs and to solve the special environment wiring difficulties.

Appearance

Specifications


Device connector

Video Transmitter :

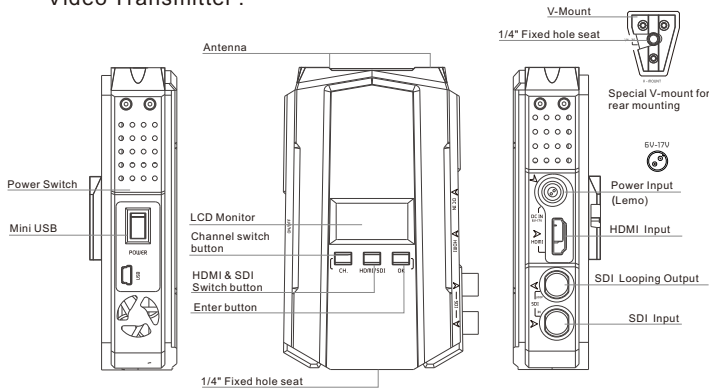

Device connector

Video Receiver :

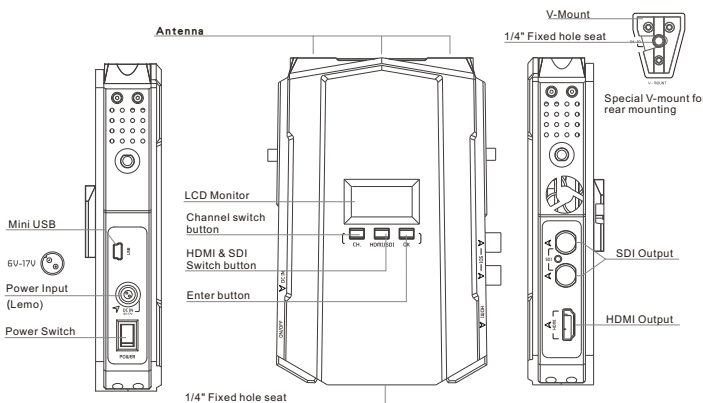

Item	Specifications
Operating frequency range	5.8(GHz)
Signal bandwidth	40MHz
Video formats	1080P 23.98/24/25/30/50/60 1080PSF 23.98/24/25 1080i 50/59.94/60 720P 50/59.94/60 576P 576i 480P 480i
Audio formats	PCM · DTS-HD · Dolby True HD
SMPTE time	SMPTE-12M
Transmission distance	More than 600 Meter(Point-to-point accessibility)

Signal Transmitter	
Antenna	Antenna X2
Transmission power	20dBm
Connector	HDMI Input · SDI Input · SDI Looping Output · Mini USB LEMO(0B/2 core) · Power · Antenna RPSMA · Power Switch
Fixed mode	1/4 "screw hole holder, V-seat (optional)
LCD Monitor	HDMI & SDI Signal Switch
Power supply	6V~17V
Power consumption	7W~8W
Dimensions (mm)	119 x 79 x 32mm
Working environment	Operating temperature: -10° ~60° Storage temperature: -40° ~80°

Signal Receiver	
Antenna	Antenna X5
Transmission power	-70dBm
Connector	HDMI Output · SDI Output x2 · Mini USB · LEMO(0B/2 core) · Power · Antenna RPSMA · Power Switch
Fixed mode	1/4 "screw hole holder, V-seat (optional)
LCD Monitor	HDMI & SDI Signal Switch
Power supply	6V~17V
Power consumption	7W~8W
Dimensions (mm)	155 x 111 x 32mm
Working environment	Operating temperature: -10° ~60° Storage temperature: -40° ~80°

Note: Product specification subject to change without notice

Applicable environment



Television shooting



Sports Broadcast



Remote Monitoring



Live Broadcast



Stage Broadcast

Video Access Technology Corp.

6F.- 17, No.14, Lane 609, Sec. 5, Chongxin Rd., Sanchong Dist., New Taipei City, Taiwan (Tong Cheng Industrial Zone)
Tel:+886-2-2999-8383 Fax:+886-2-2999-0303
web : www.videoaccess.com