

HDMI TO AHD VIDEO CONVERTER

HDMI TO AHD WITH HDMI LOOP OUT

Model No.: AHD-ER03HR

Operating Instruction



FEATURES

- Receive the HDMI video then converter to AHD output and HDMI loop output.
- The HDMI video input supports:
1280x720,800x600,1024x768,1280x1024,1440x900,1920x1080.
- The output of AHD supports 720P or 1080P 30/25Hz. When the resolution of HDMI input is 800x600,1024x768,1280x720, the AHD output is 720P, when is other resolution, the AHD output is 1080P.
- The resolution of HDMI loop output is same as the HDMI input.
- With 720P / 1080P switch to control the AHD output.
- With POWER LED and RUN LED.

SPECIFICATIONS

Video Input	1-ch HDMI
Video Output	AHD, HDMI LOOP OUT
Power Supply	DC12V/1A
Consumption	≤3W
Working Temperature	-10 °C ~ + 55 °C
Working Humidity	10% ~ 90%
Dimension	147 × 90 × 36 mm (5.78"x3.54"x1.41")
Weight	≤0.32kg

PANEL DESCRIPTIONS

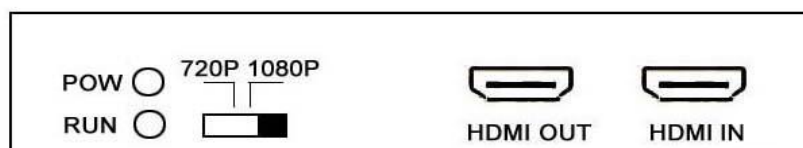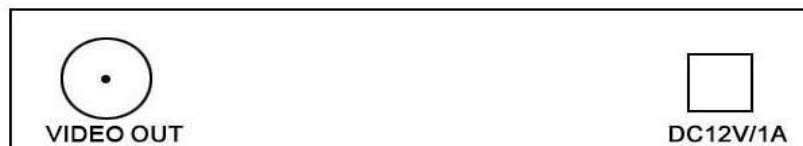

CONNECTING AND OPERATING

- 1) Connect the HDMI source into the HDMI IN.
- 2) Connect the AHD output to AHD receive device.
- 3) Connect power adapter into the device. For a moment, when the RUN LED is flashing, the device works normally.

PACKING CONTENTS

- 1) HDMI TO AHD Converter
- 2) Operating Instructions
- 3) Power adapter DC12V/1A

MAINTENANCE

Clean the unit with a soft, dry cloth, never use alcohol, paint thinner or benzene to clean the unit.

Dear Customer

Thank you for purchasing this product, for optimum performance and safety, please read these instructions carefully before connecting/operating this product. Please keep the manual for future reference.