

HDMI TO TVI VIDEO CONVERTER

HDMI TO TVI WITH HDMI LOOP OUT

Model No.: TVI-ER03HR

Operating Instruction



FEATURES

- Receive the HDMI video then convert to TVI output and HDMI loop output.
- The HDMI video input supports:
800x600, 1024x768, 1280x720, 1280x1024, 1360x768, 1366x768, 1440x900,
1920x1080P 60/59.94/50/30/25 Hz.
- HDMI input supports: 1080i 60/59.94/50Hz.
- The output of TVI supports 1080P or 720P 30/25Hz.
- The resolution of HDMI loop output is same as the HDMI input.
- With 1080P / 720P and NTSC/PAL switch to control the TVI output.
- With POWER LED and RUN LED.
- When HDMI connection is lost, the Converter transfer a black screen and send text
"connection lost" on screen as an alert.

SPECIFICATIONS

Video Input	1-ch HDMI
Video Output	TVI / HDMI LOOP OUT
Power Supply	DC12V/1A
Consumption	≤3W
Working Temperature	-10 °C ~ + 55 °C
Working Humidity	10% ~ 90%
Dimension	147 × 90 × 36 mm (5.78"x3.54"x1.41")
Weight	≤0.32kg

PANEL DESCRIPTIONS

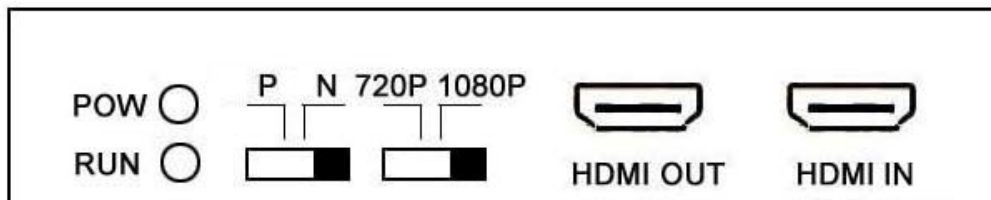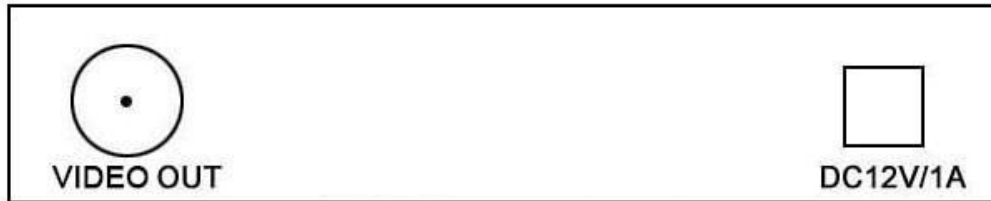

CONNECTING AND OPERATING

- 1) Connect the HDMI source into the HDMI IN.
- 2) Connect the TVI output to TVI receive device.
- 3) Connect power adapter into the device. For a moment, when the RUN LED is flashing, the device works normally.

PACKING CONTENTS

- 1) HDMI TO TVI Converter
- 2) Operating Instructions
- 3) Power adapter DC12V/1A

MAINTENANCE

Clean the unit with a soft, dry cloth, never use alcohol, paint thinner or benzene to clean the unit.

Dear Customer

Thank you for purchasing this product, for optimum performance and safety, please read these instructions carefully before connecting/operating this product. Please keep the manual for future reference.