

HDMI TO AHD/TVI CONVERTER

HDMI TO AHD/TVI WITH HDMI LOOP OUT

Model No. ACT-ER03HR-4K

Operating Instruction


FEATURES

- Easy to configure and robust for 24/7
- Supports HDMI 1.4
- HDMI compatible with HDCP.
- Automatically detects the HDMI EDID information.
- HDMI input supports resolutions up to 3840 × 2160.
- HDMI output supports resolutions up to 3840 × 2160.
- Supports 4K / 1080p / 720p and NTSC/PAL output switching.
- AHD and TVI video signals can be transmitted via coaxial cable or twisted-pair transmitters.
- AHD/TVI signal transmission distance: up to 300 meters.
- 3.5 mm mono audio output.
- Supports video input from computers and TV boxes.
- Compatible with digital content protection services such as YouTube and Netflix.

SPECIFICATIONS

Video Input	1-ch HDMI
Video Output	AHD, TVI Signal / BNC x 1
Power Supply	DC12V/2A
Consumption	≤3W
Working Temperature	-10°C ~ 60°C (14°F ~ 140°F)
Working Humidity	10% ~ 90%
Dimension	155 × 93 × 27 mm
Weight	≤0.32kg

PANEL DESCRIPTIONS

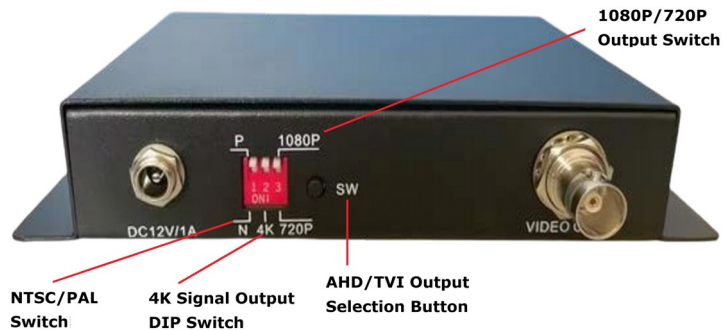

CONNECTING AND OPERATING

- 1) Connect the HDMI source into the HDMI in.
- 2) Connect the AHD/TVI output to AHD/TVI receive device.
- 3) Connect the power adapter. The device operates normally when the RUN LED is flashing

PACKING CONTENTS

- 1) HDMI TO AHD/TVI Converter
- 2) Operating Instructions
- 3) Power adapter DC12V/2A

MAINTENANCE

Clean the unit with a soft, dry cloth, never use alcohol, paint thinner or benzene to clean the unit.

Dear Customer

Thank you for purchasing this product, for optimum performance and safety, please read these instructions carefully before connecting/operating this product. Please keep the manual for future reference.